

TS SU Type

Heat-Sanitized Brackish Water Reverse Osmosis Membrane Element with Outer Permeate Tube Connection

Toray's Heat-sanitized RO membrane elements provide superior permeate quality for applications requiring hot water sanitization. Using heat-sanitized RO elements eliminates the need for chemical sanitization, further reducing maintenance costs. RO elements use cross-linked fully aromatic polyamide composite membranes.






Product Specifications	Unit	SU-710T	SU-720TS
Size		4040	8040
Membrane Area	m ²	7	34
Nominal Salt Rejection	%	99.4	99.4
Min. Salt Rejection	%	99.0	99.0
Nominal Product Flow Rate	gpd (m ³ /d)	1,720 (6.5)	6,900 (26.0)
Min. Product Flow Rate	gpd (m ³ /d)	1,450 (5.5)	5,810 (22.0)
Feed spacer thickness	mil	37	34

Test Conditions: Feed water pressure 220 psi (1.5 MPa); Feed water temperature 77 °F (25°C); Feed water concentration 1,500 mg/L as NaCl; Brine flow rate 20 l/min (5.3 gpm) for SU-710T, 80 l/min (21.1 gpm) for SU-720TS; Feed water pH 6.5

Applications

Municipal drinking water, Industrial process water

Dimensions in. (mm)		
Size	4040	8040
A	4.0 (101)	7.9 (201)
B	40 (1,016)	40 (1,016)
C	0.83 (21)	1.26 (32)
D	0.59 (15)	0.43 (11)

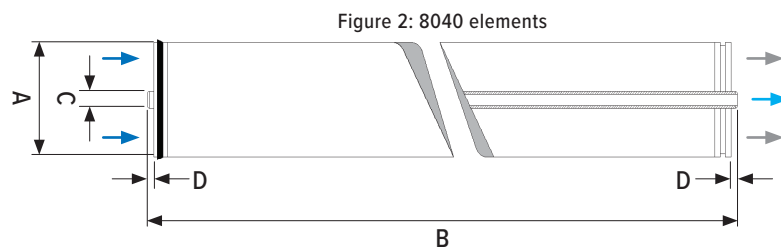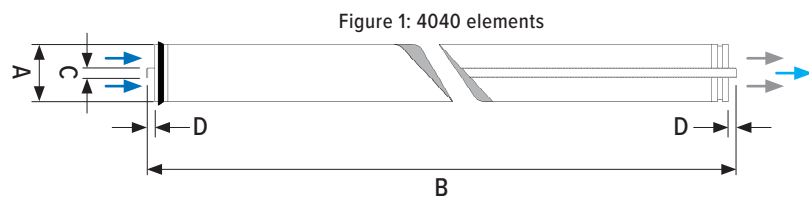

TS SU Type

Heat-Sanitized Brackish Water Reverse Osmosis Membrane Element with Outer Permeate Tube Connection

Design Conditions	Unit	Recommended ¹	
Model		SU-710T	SU-720TS
Feed water pressure ^{2,3}	MPa (psi)	< 2.0 (286)	
Feed water temperature ⁴	°C (°F)	< 35 (95)	
Feed water turbidity (SDI) ^{2,5}		< 4	
Feed water pH range	Continuous operation ⁶	3–9	
	Chemical cleaning ⁷	2–10	2–11
Feed flow rate per vessel	l/min (gpm)	<50 (13)	<200 (52.8)
Brine flow rate per vessel ⁹	l/min (gpm)	>10 (2.6)	>40 (10.6)
Brine/Permeate flow ratio ^{8,9}		> 6	
Pressure drop per element ¹⁰	MPa (psi)	< 0.1 (14)	
Pressure drop per vessel ¹⁰	MPa (psi)	< 0.2 (29)	

- The recommended design range is operational and design conditions under not so much fouling and scaling. If the SU-series element are operated outside of the recommended design range, the effective membrane life may be reduced. Refer to Toray's membrane manuals on our website (www.water.toray), or contact Toray or a local distributor for design guidelines and further information.
- High flux operation (under high permeate flow rate per single element) on feed water turbidity greater than 3 or 4 SDI generally results in frequent cleaning requirements. Operating pressure should be selected to maintain the flux rate, or permeate flow rate per single element.
- Maximum Feed Water Pressure 4.1 MPa (600 psi)
- Maximum Sanitization Temperature is 90 °C (194 °F) for SU-710T and 85 °C (185 °F) for SU-720TS.
- SDI = Silt Density Index measured according to ASTM D4189.
- Feed and brine water must meet these range.
- Cleaning chemicals shall be followed to Toray's technical bulletins.
- Ratio at last element.
- This figure is reducible when there is less possibility of fouling and scaling.
- Element(s) must be cleaned when pressure drop increases up to 1.5 times of initial value.

Sanitization must follow guidances in Toray's membrane manuals on our website (www.water.toray)

Toray accepts no responsibility for results obtained by the application of this information or the safety or suitability of Toray's products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product combination for their own purposes.

All data may change without prior notice, due to technical modifications or production changes. Please be sure to inquire about the latest product specifications.

Headquarters

Japan +81 3 3245 4540

Asia Pacific

China (TBMC) +86 10 8048 5216
 Singapore (TAS) +65 6226 0525
 Korea (TAK) +82 2 3279 1000

Americas (TMUS)

California +1 (858) 218 2360

Europe & Sub-Saharan Africa (TMEU)

Switzerland +41 61 415 8710

Middle East (TMME)

Saudi Arabia +966 13 568 0091
 U.A.E. +971 4 392 8811



For more info, please visit
[water.toray](http://www.water.toray)